




product data



<u>composition:</u>	bonded meltblown polypropylene (1-ply)
<u>part number:</u>	R2GL7691-1
<u>dimensions:</u>	76 cm x 91.6 m / 30" x 300'
<u>grade:</u>	light
<u>packaging:</u>	1
<u>pallet quantity:</u>	18
<u>package weight:</u>	10.8 kg / 23.9 lbs
<u>color:</u>	grey
<u>absorption:</u>	226.8 liters / 59.9 gallons
<u>fluids absorbed:</u>	UNIVERSAL (oil, water, coolants, and solvents)

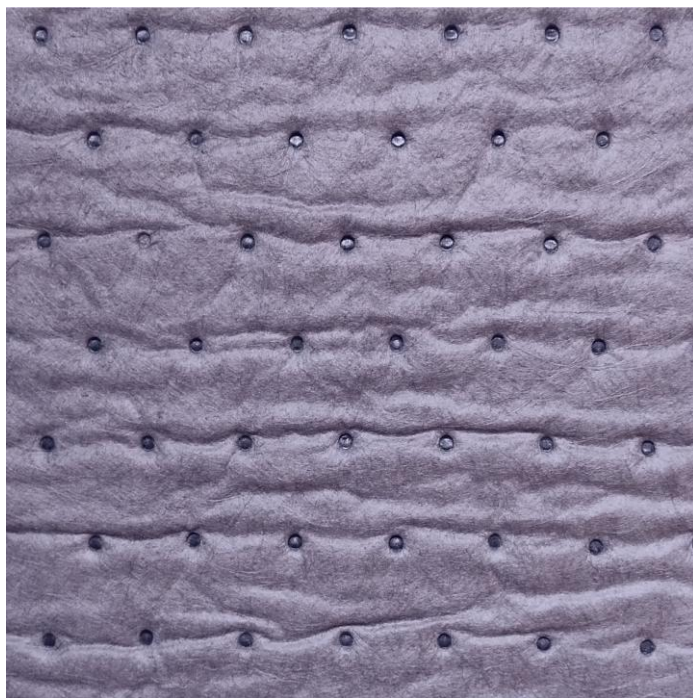

product information and usage:

Thermally bonded meltblown polypropylene sorbents have an open fiber construction that pulls in high viscosity fluids. Bond points tie down loose fibers to alleviate linting. These products are also perforated for waste minimization.

features:

- economical 1-ply sorbent
- open fiber construction for high viscosity fluids
- great for general maintenance applications
- thermal bonding ties down loose fibers
- perforated for waste minimization
- available in both pads and rolls
- absorbs oils, water, coolants & solvents



We do not recommend disposal methods. Consult with local, state, and federal authorities, as well as licensed waste haulers for specific options. Methods include landfill, incineration, and recycling (centrifuge, washing, and/or wringing).

Review our chemical compatibility chart, which is located in our website footer. For your safety, and if you are uncertain of possible chemical reactions or absorption non-performance, we recommend that you conduct compatibility and absorption testing of your chemicals with samples of these products. The compatibility chart is simply a guide.