




product data



<u>composition:</u>	bonded meltblown polypropylene (1-ply)
<u>part number:</u>	R2WM3846-2
<u>dimensions:</u>	38 cm x 45.8 m / 15" x 150'
<u>grade:</u>	medium
<u>packaging:</u>	2
<u>pallet quantity:</u>	18
<u>package weight:</u>	7.73 kg / 17.1 lbs
<u>color:</u>	white
<u>absorption:</u>	162.4 liters / 42.9 gallons
<u>fluids absorbed:</u>	OIL-SELECT (oil, gasoline, diesel, etc) and repels water

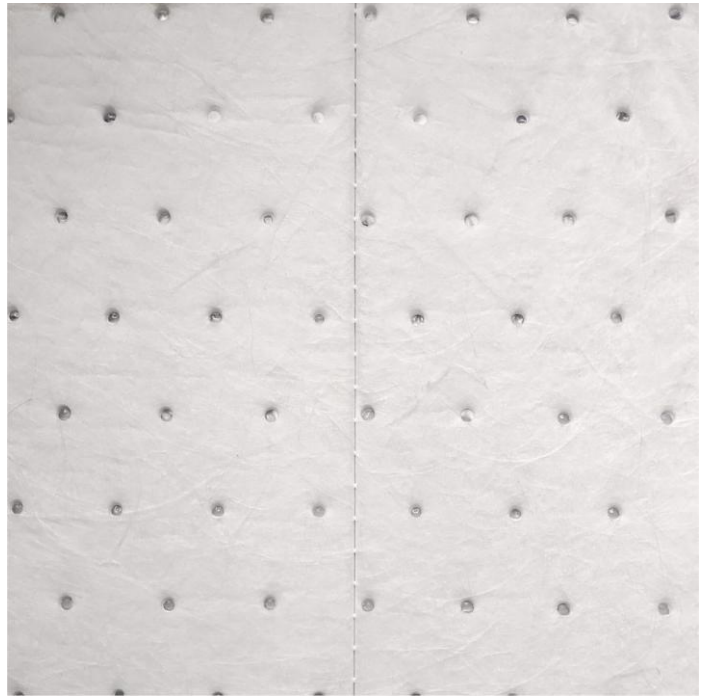

product information and usage:

Unroll these products on shorelines to absorb hydrocarbon-based fluids and protect soil from contamination. Thermally bonded meltblown polypropylene sorbents have an open fiber construction that pulls in high viscosity fluids.

features:

- economical 1-ply sorbent
- open fiber construction for high viscosity fluids
- great for general maintenance applications
- thermal bonding ties down loose fibers
- perforated for waste minimization
- used on shorelines to absorb oil
- absorbs hydrocarbons and repels water



We do not recommend disposal methods. Consult with local, state, and federal authorities, as well as licensed waste haulers for specific options. Methods include landfill, incineration, and recycling (centrifuge, washing, and/or wringing).

Review our chemical compatibility chart, which is located in our website footer. For your safety, and if you are uncertain of possible chemical reactions or absorption non-performance, we recommend that you conduct compatibility and absorption testing of your chemicals with samples of these products. The compatibility chart is simply a guide.